


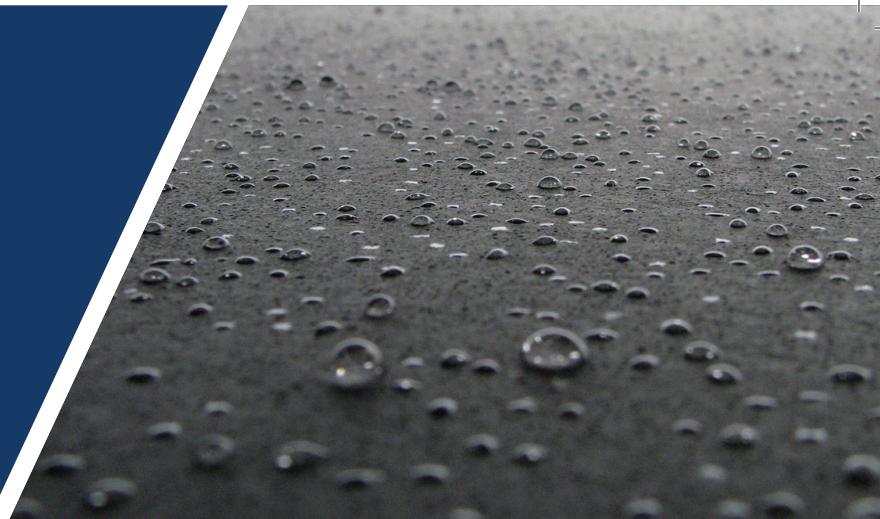

CoatOSil F emulsion is a waterborne, solvent-free, polysiloxane additive for use in waterborne paint formulations to enhance performance and durability. It is an excellent candidate to consider for use in exterior and interior architectural paints.

Paints containing CoatOSil F emulsion typically demonstrate improved resistance to UV, water, alkali and efflorescence. Additionally, durability of color retention and water resistance can be extended by 50% or more. CoatOSil F emulsion can be added during paint manufacturing or premixed with the existing binder emulsion.

Key Features and Typical Benefits

- Long-term durability
- Outstanding water resistance after weathering
- Improved color retention and reduced chalking after weathering
- Excellent alkali and efflorescence resistance
- Ease of formulation
- Low VOC
- Excellent scuff resistance
- MIT-free biocide

Typical Physical Properties for CoatOSil F Emulsion

Appearance	Milky-white Emulsion
Active Substance Content	60% by weight
Specific Gravity	1.0
pH	5.5 - 7

Typical properties are average data and are not to be used as or to develop specifications.

General Considerations for Use

CoatOSil F emulsion can be used in a wide range of formulations, including primers and exterior/interior architectural paints, and it can be added in the letdown stage during paint manufacturing under normal mixing conditions. The typical use-level starting point range is 1-3 wt% CoatOSil F emulsion based on the total formulation weight. CoatOSil F emulsion can also be added to the binder emulsion beforehand, using the blend ratio appropriate to match the recommended dosage levels in the target paint formulations and to meet the desired performance targets. For further details on formulation and samples of CoatOSil F emulsion, please contact your local representative.


Performance Testing

Accelerated Weathering:

Accelerated weathering testing results, based on ASTM D4587-11, for four commercial waterborne exterior paints (A-D) and one 65% PVC (pigment volume concentration) lab paint formulation, are shown in Figure 1. A 3 wt% CoatOSil F emulsion based on total formulation weight was post-added to all paints.

Figure 1:

Reduced Color Fading from CoatOSil F Emulsion after Accelerated Weathering

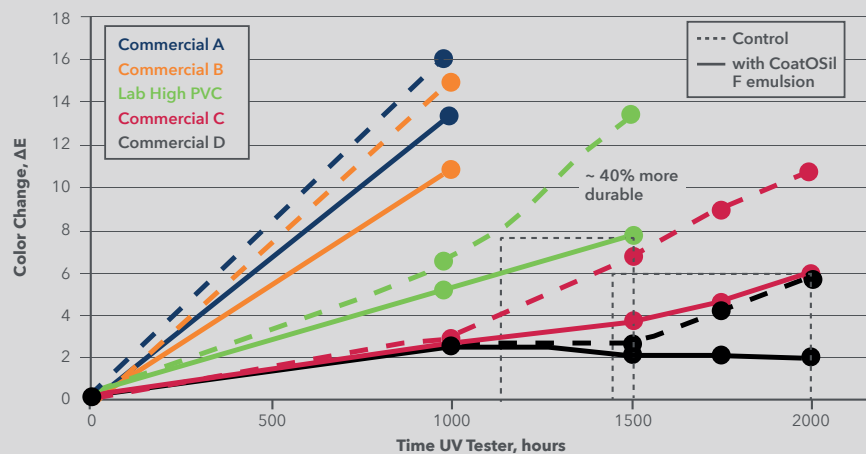

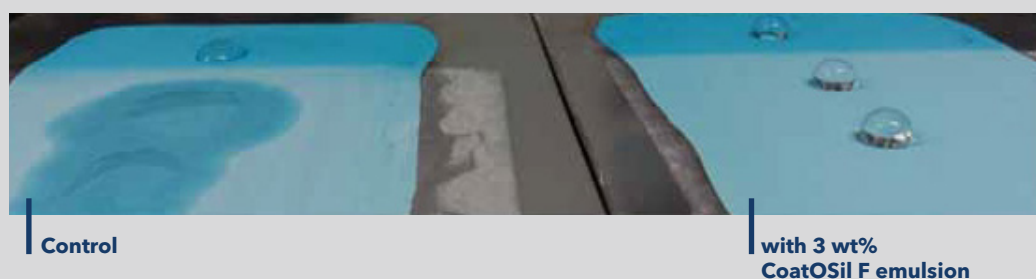
During early weathering stage, corresponding control and CoatOSil F emulsion-containing paints performed similarly. However, control paints eventually began showing sudden degradation in terms of chalking and color fading, while CoatOSil F emulsion-containing paints showed significantly better performance at the same test duration. CoatOSil F emulsion-containing paints reached the same color change after ~50% or longer duration compared to the respective control paints. Figure 2 shows panels with a lab high-PVC formulation after 1500 hours of weathering. The top regions were not exposed during accelerated weathering. Improvement in color retention can be clearly seen with CoatOSil F emulsion in the bottom regions.

Figure 2:


Reduced Color Fading from CoatOSil F Emulsion after Accelerated Weathering



In some formulations, addition of CoatOSil F emulsion increased water contact angle, but dramatic beading effect was not seen immediately when compared to the respective control paint. However, during weathering, water contact angle continuously reduced for control paints, but the same paints containing CoatOSil F emulsion reached a significantly higher contact angle after early weathering and it was retained for a longer time. To illustrate this, Figure 3 shows a commercial paint formulation (A) where water droplets were placed on regions that were exposed (bottom) and not exposed (top) to accelerated weathering for 1000 hrs. After weathering, there was significant water spreading and absorption in the control paint, while the paint containing CoatOSil F emulsion showed excellent water resistance.

Figure 3:**Improved Water Resistance After Accelerated Weathering****Exterior Weathering:**

To validate accelerated weathering results, real-world exposure studies were performed. Figure 4 shows water resistance after 18 months weathering for commercial formulation C. Paint containing CoatOSil F emulsion continued to demonstrate excellent water resistance, whereas the control film showed significant water absorption.

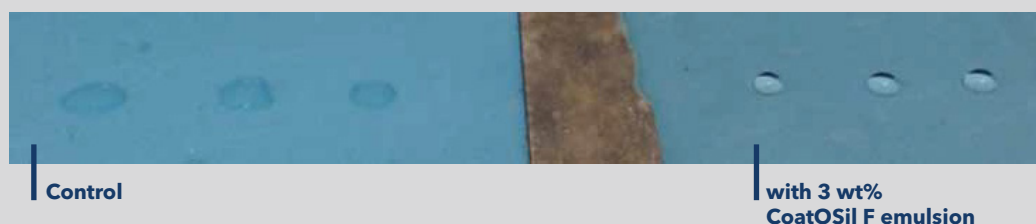Figure 4:**Water Resistance Testing after 18 Months of Real-World Exposure Testing****Efflorescence Resistance:**

As shown in Figure 5, the addition of 5 wt% CoatOSil F emulsion showed significant improvement in efflorescence resistance tested using an in-house accelerated test method. Samples were placed vertically in salt solution which migrated through capillary action and white deposits were monitored over paint surface.

Figure 5:**Improved Efflorescence Resistance**

Scuff Resistance

CoatOSil F showed significant improvement in scuff resistance. To illustrate this, Table 1 shows the interior high gloss paint formulation at 16% PVC.


As shown in Figure 6 the addition of 1,5% active content of CoatOSil F showed the reduction of scuff marking with respect of CoatOSil F sample and the control sample using in-house test method. The samples were prepared by applying the test paint to a sealed panel with 7 mil bird applicator and dry at room temperature for minimum 7 days before test. Several scuffing objects as rubber, plastic and synthetic leather were used at the same force for control and test samples.

Table 1 Interior High Gloss Paint Formulation

Ingredients	Function	Gloss, 16% PVC Amount (gm)
MILLBASE		
Demineralized water	Water	10,68
Propylene glycol	Solvent	1,45
Sodium salt of maleic acid copolymer (25% solid)	Pigment dispersant	0,82
Nonionic surfactant	Wetting agent	0,09
Mineral Oil Defoamer	Defoaming	0,13
TiO ₂	Mineral pigment	21,24
Rheology additive	Low shear builder/anti settling	0,09
Amino methyl propanol (95%)	pH adjustment	0,14
High Speed Disperser for 30 min at 2500 RPM		
LETDOWN		
Nonionic associative thickener	High shear thickener	2,16
Acrylic latex (50% solid, MFFT 16°C)	Binder	48,48
Demineralized water	Water	10,19
Ester alcohol	Coalescent	0,97
Nonionic surfactant	Surfactant	0,09
Mineral Oil Defoamer	Defoaming	0,06
CoatOSil™ F	Scuff resistant additive	2,5
In-can preservative	Biocide	0,09
Dry-film preservative	Biocide	0,24
Nonionic associative thickener	Mid shear thickener	0,58
Mixing for 30 min at 800-1000 RPM		
TOTAL		100.00

Figure 6

Improved Scuff resistance

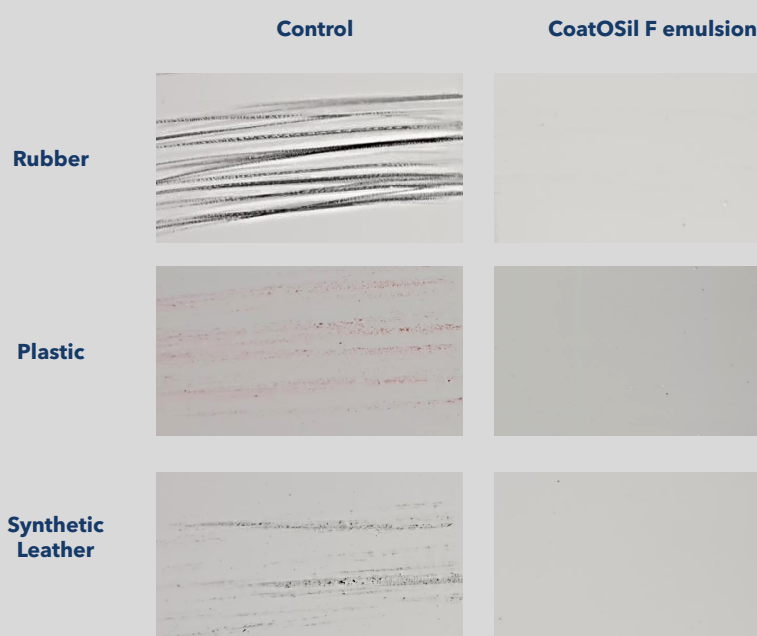

Patent Status

Nothing contained herein shall be construed to imply the nonexistence of any relevant patents or to constitute the permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of the patent.

Limitations

Customers must evaluate Momentive Performance Materials products and make their own determination as to fitness of use in their particular applications.

Product Safety, Handling and Storage

Customers should review the latest Safety Data Sheet (SDS) and label for product safety information, safe handling instructions, personal protective equipment if necessary, emergency service contact information, and any special storage conditions required for safety. Momentive Performance Materials (MPM) maintains an around-the-clock emergency service for its products. SDS are available at www.momentive.com or, upon request, from any MPM representative.

For product storage and handling procedures to maintain the product quality within our stated specifications, please review Certificates of Analysis, which are available in the Order Center. Use of other materials in conjunction with MPM products (for example, primers) may require additional precautions. Please review and follow the safety information provided by the manufacturer of such other materials.



Customer Service Centers

Worldwide Email:
commercial.services@momentive.com

AMERICAS

+1 800 295 2392

Toll free*

+ 704 805 6946

Direct Number

LATIN AMERICA**BRAZIL**

+55 11 4534 9650

Direct Number

MEXICO

+52 55 2169 7670

Direct Number

*All American countries

ASIA PACIFIC**CHINA**

800 820 0202

Toll free

+86 21 3860 4892

Direct number

JAPAN

+81 3 5544 311

Direct number

KOREA

+82 2 6201 4600

Direct number

**EMEAI- EUROPE,
MIDDLE EAST,
AFRICA & INDIA****EUROPE**

+ 390510924300

Direct number

**INDIA, MIDDLE EAST
& AFRICA**

+ 91 44 71212207

Direct number*

*All Middle Eastern countries,
Africa, India, Pakistan,
Bangladesh, Sri Lanka.

**SOUTH EAST ASIA,
AUSTRALIA &
NEW ZEALAND**

+60 3 9206 1543

Direct number*

*South East Asia countries
(Malaysia, Singapore,
Thailand, Indonesia,
Vietnam, Philippines,
Cambodia, Myanmar /
other countries located in
Pacific region).

Disclaimer

Each user bears full responsibility for making its own determination as to the suitability of Supplier's materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished parts incorporating Supplier's products, materials, or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of Supplier's standard Conditions of Sale or this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Supplier. No statement contained herein concerning a possible or suggested use of any material, product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Supplier covering such use or design, or as a recommendation for the use of such material, product, service or design in the infringement of any patent or other intellectual property right.

BEFORE HANDLING ANY PRODUCTS MENTIONED, REVIEW THE LATEST SAFETY DATA SHEET (SDS) AND LABEL FOR PRODUCT SAFETY INFORMATION, SAFE HANDLING INSTRUCTIONS, PERSONAL PROTECTIVE EQUIPMENT IF NECESSARY, EMERGENCY SERVICE CONTACT INFORMATION, AND ANY SPECIAL STORAGE CONDITIONS REQUIRED FOR SAFETY. MOMENTIVE MAINTAINS AN AROUND-THE-CLOCK EMERGENCY SERVICE FOR ITS PRODUCTS. SDS FOR MOMENTIVE PRODUCTS ARE AVAILABLE AT WWW.MOMENTIVE.COM OR, UPON REQUEST, FROM ANY MOMENTIVE REPRESENTATIVE. USE OF OTHER MATERIALS IN CONJUNCTION WITH MOMENTIVE PRODUCTS MAY REQUIRE ADDITIONAL PRECAUTIONS. PLEASE REVIEW AND FOLLOW THE SAFETY INFORMATION PROVIDED BY THE MANUFACTURER OF SUCH OTHER MATERIALS.

THE MATERIALS, PRODUCTS AND SERVICES OF MOMENTIVE PERFORMANCE MATERIALS INC. AND ITS SUBSIDIARIES AND AFFILIATES (COLLECTIVELY "SUPPLIER"), ARE SOLD SUBJECT TO SUPPLIER'S STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT, PRINTED ON THE BACK OF ORDER ACKNOWLEDGMENTS AND INVOICES, AND AVAILABLE UPON REQUEST. EXCEPT AS PROVIDED IN SUPPLIER'S STANDARD CONDITIONS OF SALE, SUPPLIER AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN.

Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of Supplier's standard Conditions of Sale or this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Supplier.

The use of the "TM" symbol designates registered or unregistered trademarks of Momentive Performance Materials Inc. or its affiliated companies.

Momentive and the Momentive logo are registered trademarks of Momentive Performance Materials Inc.

Copyright 2022 Momentive Performance Materials Inc. All rights reserved.